

DECLARATION OF PERFORMANCE

No. DOP: 0432-CPR-00781-20



0432

1. Unique identification code of the product types:

System chimneys and construction parts made of stainless steel with 30 mm heat insulation -
System ADAM DW according to EN 1856-1: 2009

2. Identification of the construction product, in accordance with Article 11 § 4:

System ADAM DW

Version 444 (D) T600 – N1 – D – V2 – L99050 – G50 DN(80-200)

Version 444 (W) T600 – N1 – W – V2 – L99050 – O50 DN(80-200)

3. Use or intended use of the construction product in accordance with the relevant harmonized technical specification as provided by the manufacturer:

Evacuation of combustion products from the furnace to the outside atmosphere for standard applications (negative pressure)

4. Name, company name or trademark and contact address of the manufacturer, in accordance with Article 11 § 5:

Kratki.pl Marek Bal
ul. W. Gombrowicza 4
PL 26-660 Wsola / Jedlińsk
Tel: +48 389 99 11
e-mail: detal@kratki.com

5. Name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12 §2:

not applicable

6. The system or systems of assessment and verification of constancy of performance of construction product in accordance with Annex V:

System 2+

7. Notified body certifying the factory production control No 0432

Materialprüfungsamt Nordrhein-Westfalen
Marsbruchstraße 186; D-44287 Dortmund

has carried the initial inspection of the factory and control of factory production and performs the continuous surveillance, assessment and approval of factory production control and on the 11.05.2021 has issued the compliance certificate No 0432-CPR-00781-20 for the factory production control.

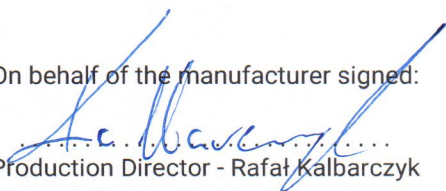
8. Declared performance in accordance with EN 1856-1:2009, annex ZA

Essential characteristics	Performance	Comments
Materials and sheet thicknesses		
Inner pipe	L99: 1.4521 from 0,5 mm (minimum 0,45 mm)	
Outer pipe	1.4509, 1.4301 from 0,4 mm (minimum 0,45 mm)	
Thermal insulation	30 mm pipe section insulation (density: 105 ⁺³⁰ kg/m ³) pressure-injected insulation (density: 170-190 kg/m ³)	
Mechanical strength		
Compressive strength Segments of the chimney, fittings and supports	Maximum height of the chimney: on tee-pipe: to 43 m on wall console: to 18 m	For more information, see the manual
Non-vertical installation	3 m at 45°	The maximum distance between two supports
Wind load resistance	DN (80-300): 4 m	The maximum distance between the two side fixings
	DN (80-150): 2,5 m DN (180, 200): 2,0 m	Free end above the last clamping
Working conditions		
Fire resistance	Dry conditions: to T600 – G50 Wet conditions: to T600 – O50	Tested in fully ventilated floor penetrations
Tightness	N1 (leakage rate for 40 Pa: less than 2,0 [l s ⁻¹ m ⁻²])	Working in negative pressure
Flow resistance Fittings and terminals	According to EN 13384-1, R = 1 mm	Normative value: see the method of calculation
Thermal resistance	0,56 m ² K/W	Specified at 200°C
Resistance to thermal shock		
Heat load at nominal temperature	T600	Test temperature 700°C
Sootfire resistance	D: Yes (designation G) W: Not (designation O)	Tested at 1000°C (30 min)
Durability		
Water vapor diffusion and water resistance	D: Not (designation D) W: Yes (designation W)	
Condensate penetration resistance	D: Not (designation D) W: Yes (designation W)	

Corrosion resistance	V2	For gas, fuel oil and wood, including non-chemically treated wood pellets (according to EN 1443:2019)
Freeze-thaw resistance	Yes	
Additional information		
Carrying away of condensate	(D) M251 instruction of Sewage Disposal Methods Association	Necessary neutralization of sewage
Storage conditions	Do not store in corrosive environment	
Methods of cleaning	Do not use the tools of black steel	
Position of cleaning openings	(D): According to DIN 18 160	Observe the national regulations
Identification of flue systems	(D): According to DIN 18 160 Durable plate, mounted on installation, housing or casing	Observe the national regulations
Protection against contact	Labeling or spacers at temperatures $\geq 70^{\circ}\text{C}$	
Direction of flow	Core pipe female socket upwards	
Installation and assembly	Follow the instructions	

9. The performance of the product identified in points 1 and 2 is consistent with the declared performance in point 8. This declaration of performance is issued under the sole responsibility of the manufacturer mentioned in point 4.

On behalf of the manufacturer signed:


Production Director - Rafał Kalbarczyk

Jedlińsk 10-07-2024